




GECI MOD 3.0

Main features:
 Modular system (5-6 configurable modules)
 Power up to 16 kW, 300A @ 48 V,
 up to 200A @ 80 V, up to 150A @ 96V
 Programmable via USB type A/B port or via display
 Graphical display



APPLICATIONS

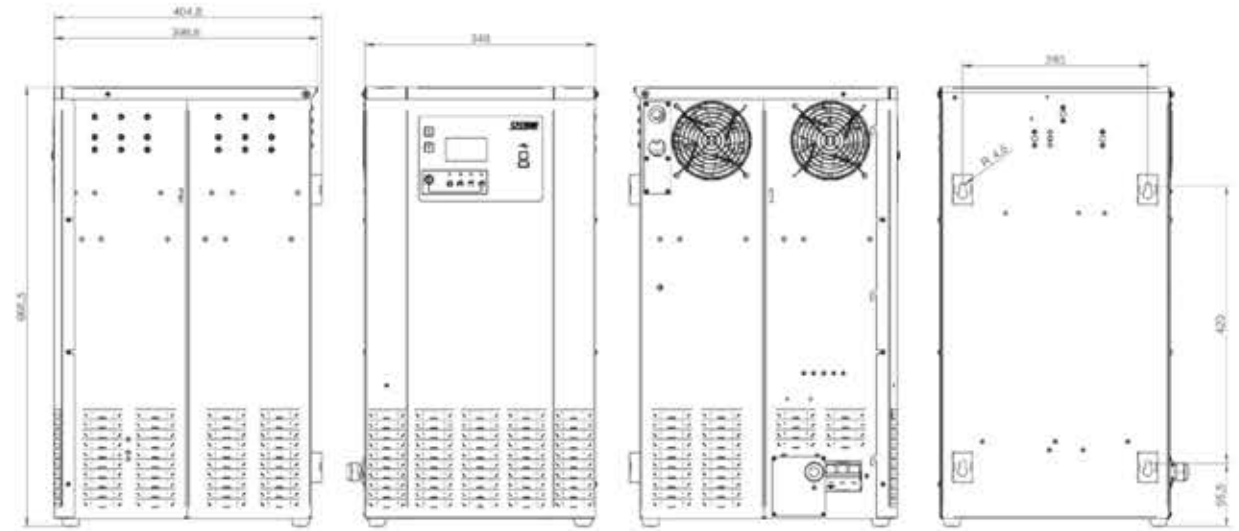

DIMENSIONS (LxWxH): 348x665,50x398,60 mm – 13.70x26.20x15.70 in.
 WEIGHT: 61 Kg – 134.48 lbs
 PROTECTION GRADE: IP20
 ONLY INPUT VOLTAGE: 400/480Vac

Battery Voltage	I/la Wet 8h Range (C5)	I/la Wet 12h Range (C5)	I/la Gel PzV 10-14h Range (C5)	Charging Current	Model
24V	1240 ÷ 1510 Ah	1980 ÷ 2420 Ah	1520 ÷ 1860 Ah	220A	24-220
	1410 ÷ 1720 Ah	2250 ÷ 2750 Ah	1730 ÷ 2120 Ah	250A	24-250
	1580 ÷ 1930 Ah	2520 ÷ 3080 Ah	1940 ÷ 2370 Ah	280A	24-280
	1690 ÷ 2060 Ah	2700 ÷ 3300 Ah	2080 ÷ 2540 Ah	300A	24-300
36V	1240 ÷ 1510 Ah	1980 ÷ 2420 Ah	1520 ÷ 1860 Ah	220A	36-220
	1410 ÷ 1720 Ah	2250 ÷ 2750 Ah	1730 ÷ 2120 Ah	250A	36-250
	1580 ÷ 1930 Ah	2520 ÷ 3080 Ah	1940 ÷ 2370 Ah	280A	36-280
	1690 ÷ 2060 Ah	2700 ÷ 3300 Ah	2080 ÷ 2540 Ah	300A	36-300
48V	1240 ÷ 1510 Ah	1980 ÷ 2420 Ah	1520 ÷ 1860 Ah	220A	48-220
	1410 ÷ 1720 Ah	2250 ÷ 2750 Ah	1730 ÷ 2120 Ah	250A	48-250
	1580 ÷ 1930 Ah	2520 ÷ 3080 Ah	1940 ÷ 2370 Ah	280A	48-280
	1690 ÷ 2060 Ah	2700 ÷ 3300 Ah	2080 ÷ 2540 Ah	300A	48-300
72V	840 ÷ 1030 Ah	1350 ÷ 1650 Ah	1040 ÷ 1270 Ah	150A	72-150
	900 ÷ 1100 Ah	1440 ÷ 1760 Ah	1110 ÷ 1350 Ah	160A	72-160
	1010 ÷ 1240 Ah	1620 ÷ 1980 Ah	1250 ÷ 1520 Ah	180A	72-180
	1130 ÷ 1380 Ah	1800 ÷ 2200 Ah	1380 ÷ 1690 Ah	200A	72-200
80V	840 ÷ 1030 Ah	1350 ÷ 1650 Ah	1040 ÷ 1270 Ah	150A	80-150
	900 ÷ 1100 Ah	1440 ÷ 1760 Ah	1110 ÷ 1350 Ah	160A	80-160
	1010 ÷ 1240 Ah	1620 ÷ 1980 Ah	1250 ÷ 1520 Ah	180A	80-180
	1130 ÷ 1380 Ah	1800 ÷ 2200 Ah	1380 ÷ 1690 Ah	200A	80-200
96V	700 ÷ 860 Ah	1130 ÷ 1380 Ah	870 ÷ 1060 Ah	125A	96-125
	840 ÷ 1030 Ah	1350 ÷ 1650 Ah	1040 ÷ 1270 Ah	150A	96-150