




GECI MOD 2.0

Main features:
 Modular system (4 configurable modules)
 Power up to 10.5 kW, up to 200A @ 48V,
 up to 130A @ 80V, up to 100A @ 96V
 Programmable via USB type A/B port or via display
 Graphical display

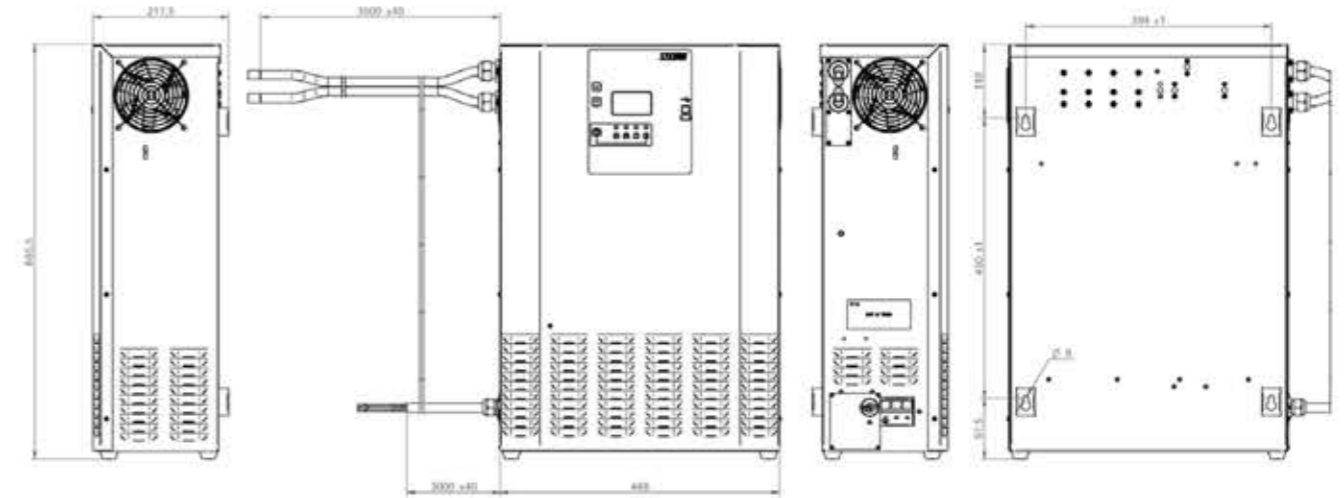

DIMENSIONS (LxWxH): 494,25x677x281 mm - 19.45x26.65x8.5 in.
 WEIGHT: 43,35 Kg - 95.5 lbs
 PROTECTION GRADE: IP20
 INPUT VOLTAGE: 200/208-240/400/480 Vac

Battery Voltage	IUIa Wet 8h Range (C5)	IUIa Wet 12h Range (C5)	IUIa Gel PzV 10-14h Range (C5)	Charging Current	Model
24V	900 ÷ 1100 Ah	1440 ÷ 1760 Ah	1110 ÷ 1350 Ah	160A	24-160
	1010 ÷ 1240 Ah	1620 ÷ 1980 Ah	1250 ÷ 1520 Ah	180A	24-180
	1130 ÷ 1380 Ah	1800 ÷ 2200 Ah	1380 ÷ 1690 Ah	200A	24-200
36V	900 ÷ 1100 Ah	1440 ÷ 1760 Ah	1110 ÷ 1350 Ah	160A	36-160
	1010 ÷ 1240 Ah	1620 ÷ 1980 Ah	1250 ÷ 1520 Ah	180A	36-180
	1130 ÷ 1380 Ah	1800 ÷ 2200 Ah	1380 ÷ 1690 Ah	200A	36-200
48V	900 ÷ 1100 Ah	1440 ÷ 1760 Ah	1110 ÷ 1350 Ah	160A	48-160
	1010 ÷ 1240 Ah	1620 ÷ 1980 Ah	1250 ÷ 1520 Ah	180A	48-180
	1130 ÷ 1380 Ah	1800 ÷ 2200 Ah	1380 ÷ 1690 Ah	200A	48-200
72V	620 ÷ 760 Ah	990 ÷ 1210 Ah	760 ÷ 930 Ah	110A	72-110
	680 ÷ 830 Ah	1080 ÷ 1320 Ah	830 ÷ 1020 Ah	120A	72-120
	730 ÷ 890 Ah	1170 ÷ 1430 Ah	900 ÷ 1100 Ah	130A	72-130
80V	620 ÷ 760 Ah	990 ÷ 1210 Ah	760 ÷ 930 Ah	110A	80-110
	680 ÷ 830 Ah	1080 ÷ 1320 Ah	830 ÷ 1020 Ah	120A	80-120
	730 ÷ 890 Ah	1170 ÷ 1430 Ah	900 ÷ 1100 Ah	130A	80-130
96V	450 ÷ 550 Ah	720 ÷ 880 Ah	550 ÷ 680 Ah	80A	96-80
	560 ÷ 690 Ah	900 ÷ 1100 Ah	690 ÷ 850 Ah	100A	96-100



APPLICATIONS

